


# DINAMO STEEL VERTICAL



Interasse dal centro foro al muro 72 mm.  
Distance between hole center and wall 72 mm.  
Distance du centre du trou au mur 72 mm.  
Abstand zwischen Lochmitte und Wand 72 mm.  
Distancia entre el centro del agujero y el muro 72 mm.  
Расстояние между центром отверстия и стеной - 72 мм.

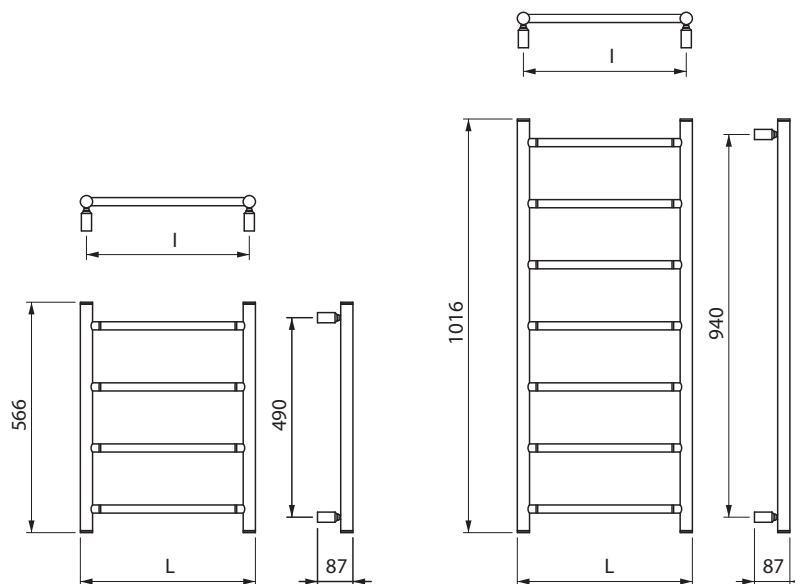

## COLOURS p./S. 8

codice code code Artikel Nr. codigo код	n° elementi n° of elements no. des éléments Anzahl der Elemente no. elementos кол-во секций	altezza height hauteur Höhe altura высота H mm	larghezza width largeur Breite ancho ширина L mm	interasse distance between bars entraxe Achsabstand distancia entre centros межцентровое расстояние I mm	Watt = Kcal/h = 0,860 Kcal/h = Watt x 0,860		
					output мощность 75/65-20 watt*	output мощность 55/45-20 watt*	output мощность 55/45-24 watt*
DINST04430...	4	566	430	400	$\Delta t50$ 104	$\Delta t30$ 54	$\Delta t26$ 45
DINST07430...	7	1016	430	400	$\Delta t50$ 169	$\Delta t30$ 87	$\Delta t26$ 73

- \* I watt hanno valori provvisori in attesa di certificazione  $\Delta t50$ .
- \* The watt values are not definitive awaiting for  $\Delta t50$  certification.
- \* Le nombre de Watts est une valeur indiquée à titre provisoire dans l'attente de la certification  $\Delta t50$ .
- \* Die Wattwerte sind vorläufig bis zur  $\Delta t50$  Zertifizierung.
- \* Los Vatos tienen valores provisionales en espera de la certificación  $\Delta t50$ .
- \* До получения сертификата  $\Delta t50$  приводится предварительное значение мощности в ваттах.

Massima pressione di esercizio: 8 bar  
**Materiale:**  
**Acciaio al carbonio**

Maximum working pressure: 8 bar.  
**Material:**  
**Carbon-steel**

Pression d'exercice maximale: 8 bars  
**Matériel:**  
**Acier**

Maximaler Betriebsdruck: 8 bar  
**Material:**  
**Kohlenstoffstahl**

Presion maxima de trabajo: 8 bar  
**Material:**  
**Acero de carbon**

Максимальное рабочее давление - 8 бар  
**Материал -**  
**Углеродистая сталь**



Raccordi per valvole eurocono . Fittings for valves eurocono . Raccords pour vannes eurocono . Klemmverschraubungen eurocono , racores para válvulas eurocono . Муфты eurocono p./S. 398