


ITALO INOX REFLEX

DOMUS3D
by MATICAD



Interasse dal centro foro al muro
min. 73 / max 96 mm.
Distance between hole center and wall
min. 73 / max 96 mm.
Distance du centre du trou au mur
min. 73 / max 96 mm.
Abstand zwischen Lochmitte und Wand
min. 73 / max 96 mm.
Distancia entre el centro del agujero
y el muro min. 73 / máx 96 mm.
Расстояние между центром отверстия и стеной
— не менее 73 мм и не более 96 мм.

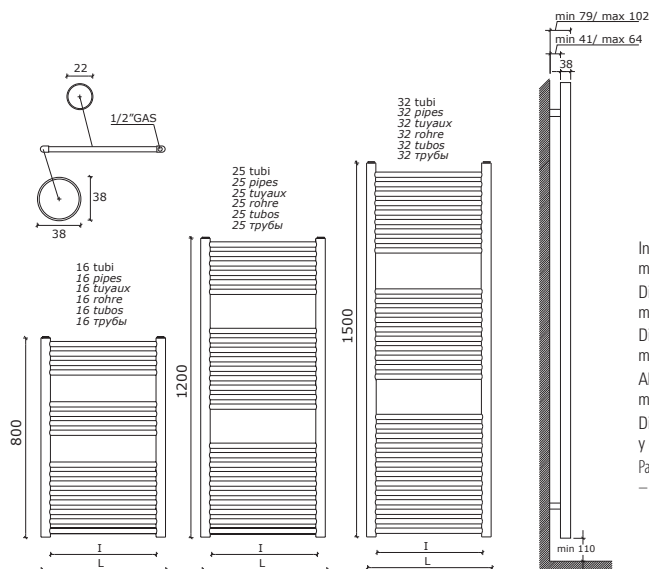

codice code code Artikel Nr. codigo код	altezza height hauteur Höhe altura высота	larghezza width largeur Breite ancho ширина	interasse distance between bars entraxe Achsabstand distancia entre centros междупольное расстояние	Watt = Kcal/h ÷ 0,860 Kcal/h = Watt × 0,860		
				75/65-20 watt/kcal/h Δt50	55/45-20 watt/kcal/h Δt30	55/45-24 watt/kcal/h Δt26
400725X	800	400	362	209	107	103
500725X	800	500	462	261	133	128
401225X	1200	400	362	313	160	154
501225X	1200	500	462	391	200	192
401525X	1500	400	362	386	197	189
501525X	1500	500	462	483	247	237

Materiale: INOX AISI 304
Pressione di esercizio:
4 bar

Material: INOX AISI 304
Working pressure: 4 bar

Matériel: INOX AISI 304
Pression d'exercice:
4 bars

Material: INOX AISI 304
Betriebsdruck: 4 bar

Material: INOX AISI 304
Presión de trabajo: 4 bar

Материал – INOX AISI 304
Рабочее давление – 4 бар

cod. 101094 - 101094CR	cod. 10101934 - 10101934CR	cod. 10107834 - 10107834CR	cod. C409BI - C409CR
p./S. 400	p./S. 390	p./S. 392	p./S. 394